






-1-

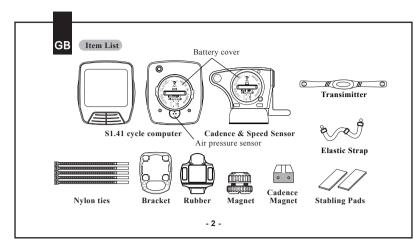


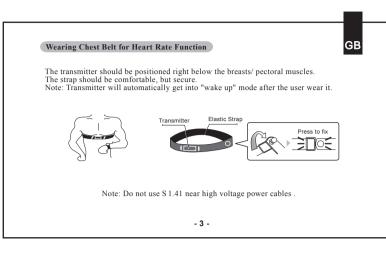


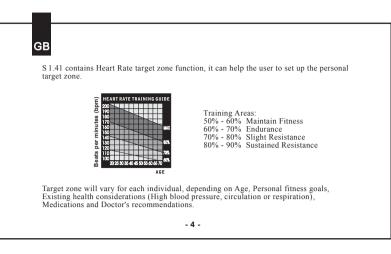


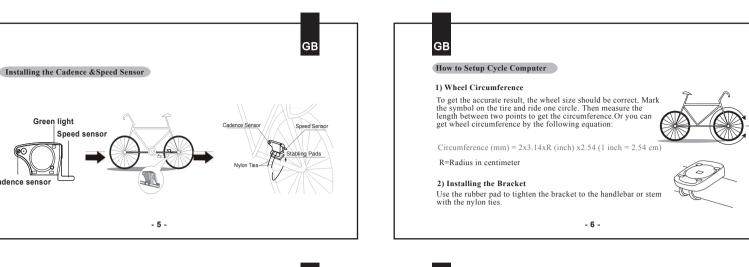


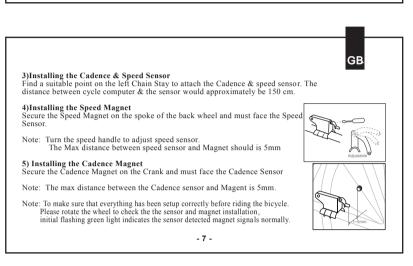


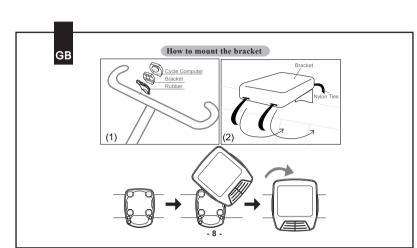


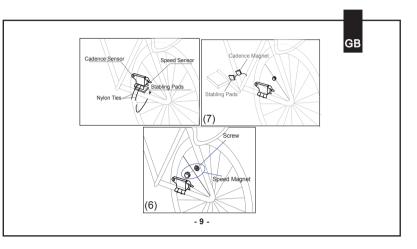


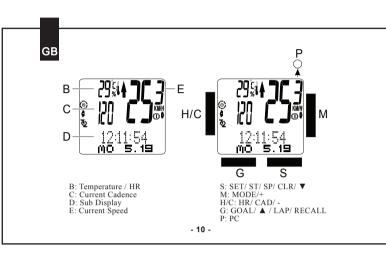


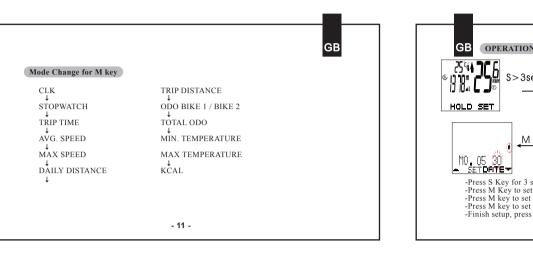


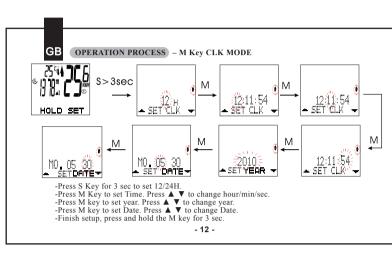


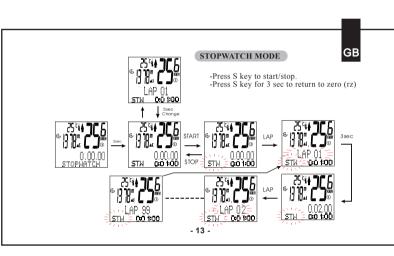


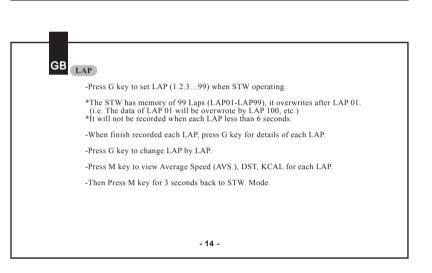


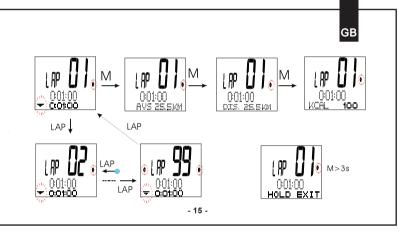


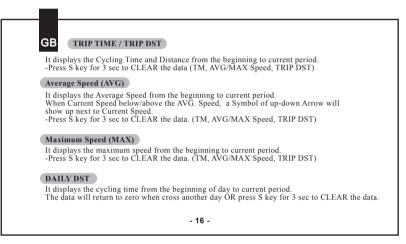


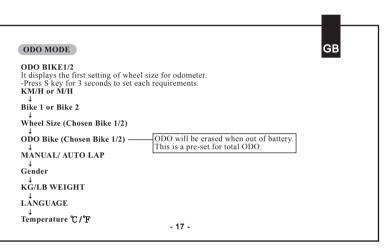


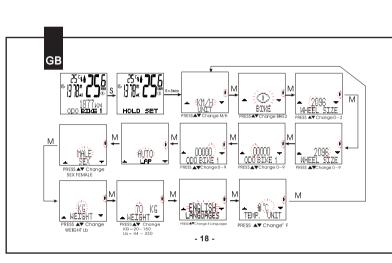


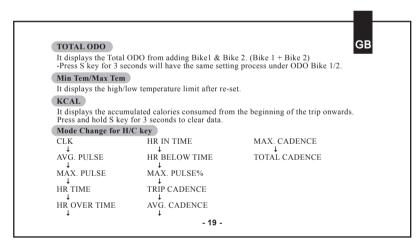


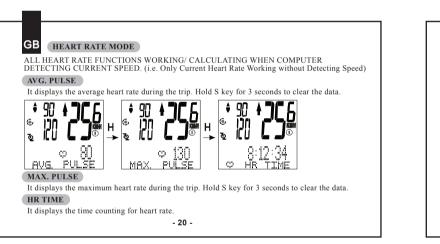


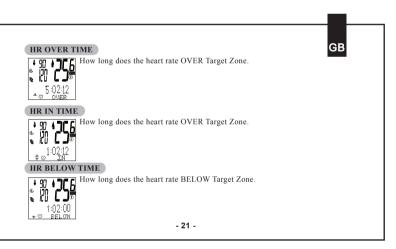


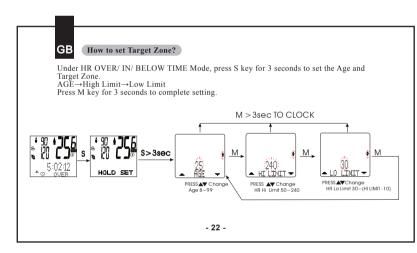


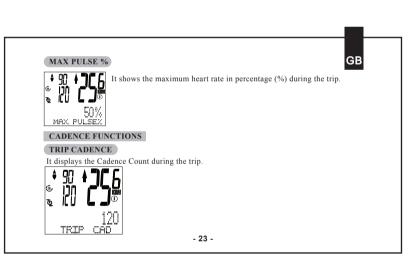


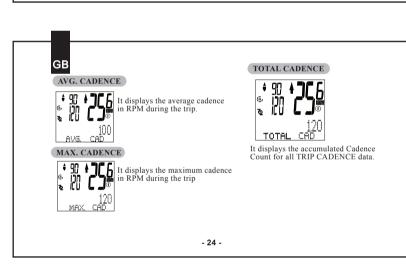


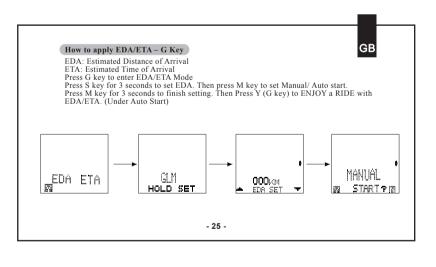


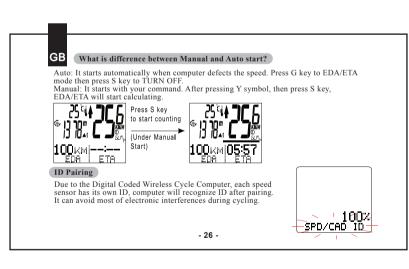


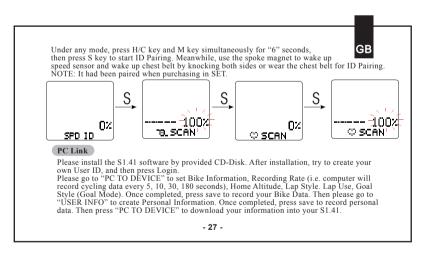


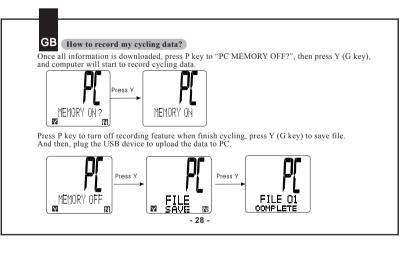


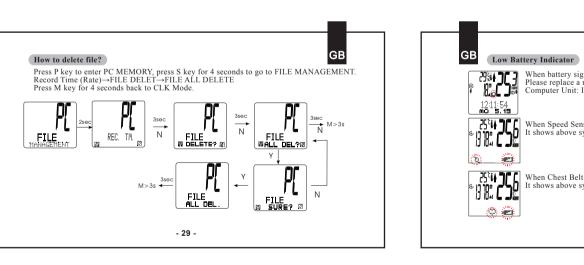

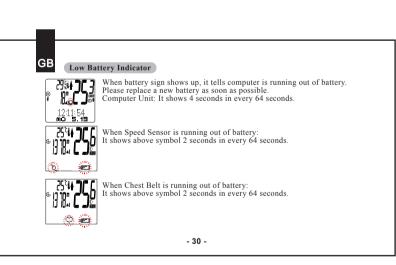

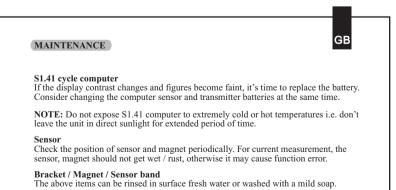


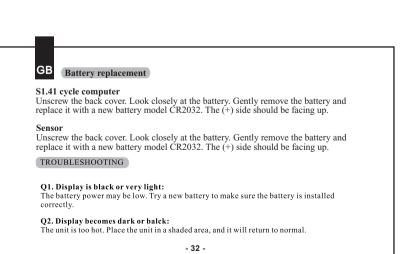


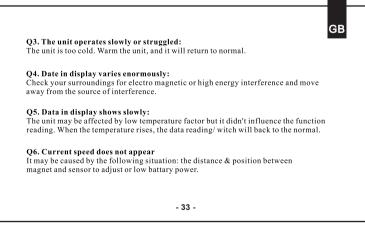

	Receiver	Cadence & Speed Sensor	Transmitter / Belt
Operating Temperature	0°C ~ 40°C	0°C ~ 40°C	0°C∼ 40°C
Storage Temperature	-10°C∼ 50°C	-10°C∼ 50°C	-10°C∼ 50°C
Emitted Frequency	2.4GHz	2.4GHz±10%	2.4GHz±10%
Battery	3 volt lithium 2032 cell	3 volt lithium 2032 cell	3 volt lithium 2032 cell
Weight	30.6 grams	20 grams	65 grams±5%

Stopwatch Range : 0~29(hour) : 59(minute) :59(second) Accuracy 1/100 seconds Timer Range : 0~29(hour) : 59(minute) :59(second) SPEED: 0~99.9KM/H,0~62.4M/H TM: 0:00:00~29:59:59 MXS: 99.9KM/H, 62.4M/H AVS: 99.9KM/H, 62.4M/H TripDIST:0.00~999.99KM,624.99ML ODOBIKE1:0~99999 · KM0~62499ML ODOBIKE2:0~99999 · KM0~62499ML TOTODO:0~199998 · KM0~62499ML ACT.ALTI:-699~3999(m) · 999-9999(ft) ALTIBIKE:10~99999(m/ft) ALTIBIKE2:0~99999(m/ft) TOT.ALTI:0~199998(m/ft) MAXALTI:3999(m)/9999(ft) TRIPCLIMB:0~9999(m/ft) ALTI.GAIN/LOSS:0~99999(m/ft) WHEELSIZE1/2:100~2999(mm) AVCAD:999 KCAL:999999 MAXCAD:999 KCAL:999999	This product is for three years limited with product will be free from defects in from the date of production. O Warranty does not cover the batteries abuse or accidents, cracked or brokes improper maintenance or commerciated. O Warranty is void if the repairs are doton the warranties contained herein are implied warranty of merchantability manufacturer be liable for any damay arising out of or related to the use of
	·

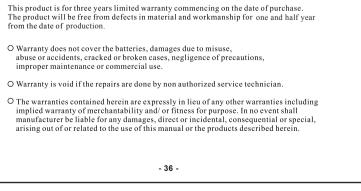

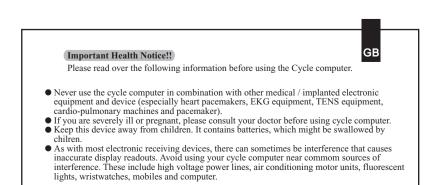

- 37 -

- 31 -

